SAKURA®

CATALOGUE

This version is applied for TBL Ha Noi CO.,LTD; Vietnam only

With special design and compound for only use of trailer or semi - trailer

All these tyres in these catalogue cannot be used for lorries truck and buses

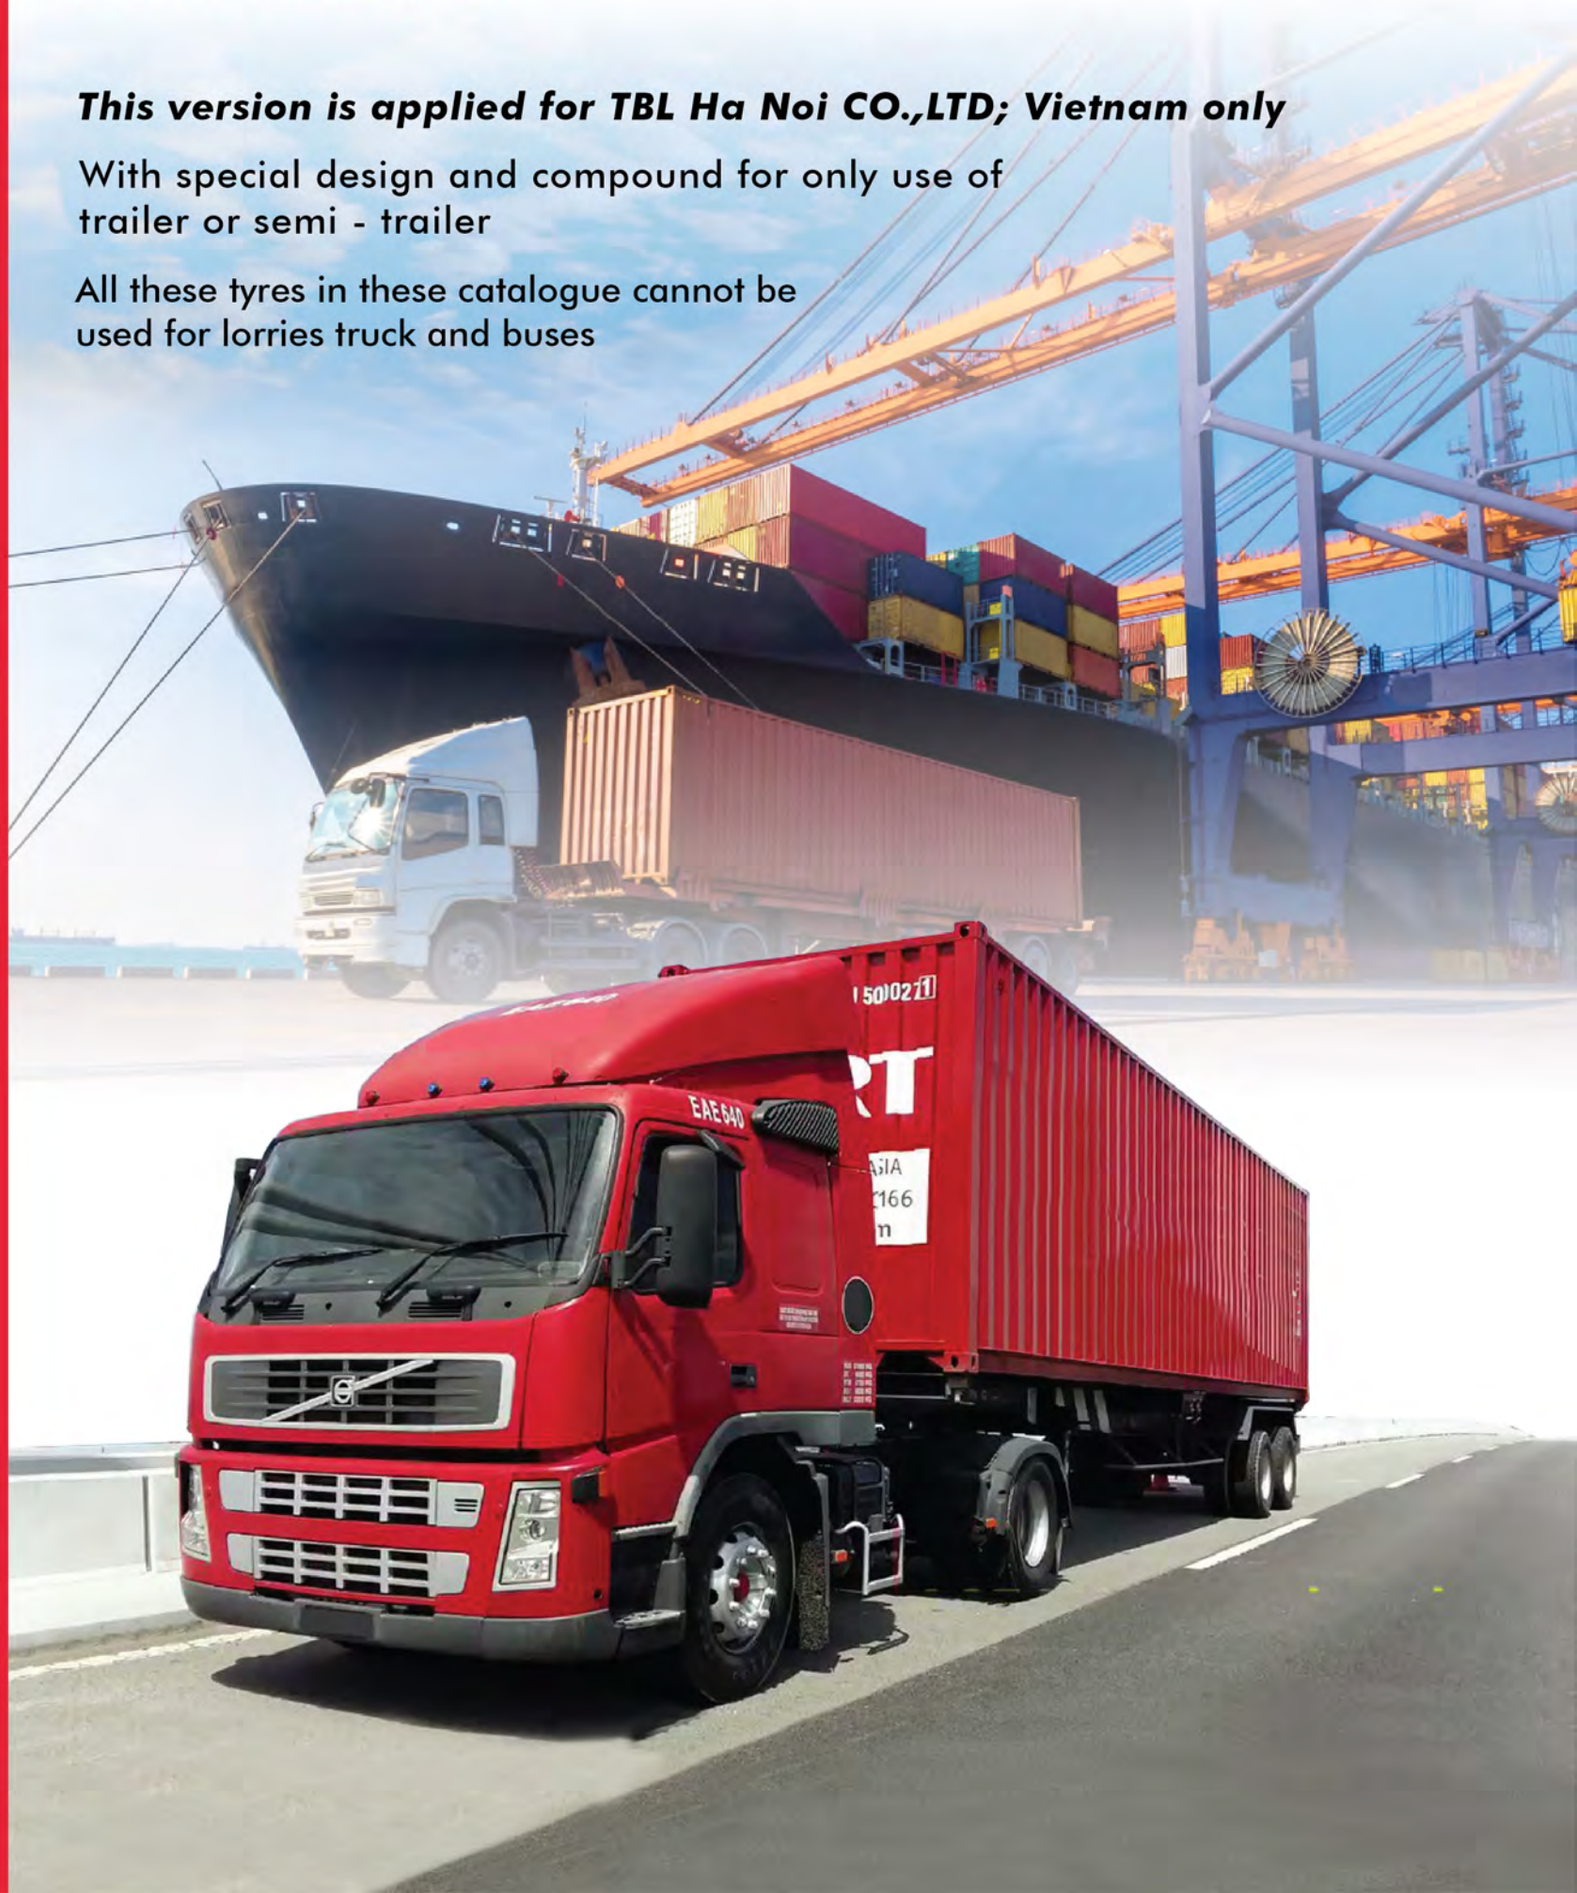

SAKURA®

SR215

- Designed for only trailer or semi - trailer
- Better performance for stone and mud resistance
- Low rolling resistance and fuel saving
- Special tread structure offers long abrasion resistance

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
215/75R17.5 135/133J	16	775	211	(S) 850/123 (D) 850/123	(S) 2180/4805 (D) 2060/4540	6.00	TL
235/75R17.5 143/141J	16	804	240	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75	TL
245/70R17.5 143/141J	18	792	245	(S) 875/128 (D) 875/128	(S) 2725/6005 (D) 2575/5675	7.50	TL
275/70R22.5 148/145L	18	967	277	(S) 900/130 (D) 900/130	(S) 3150/6940 (D) 2900/6395	8.25	TL
275/80R22.5 149/146M	18	1023	279	(S) 900/130 (D) 900/130	(S) 3250/7160 (D) 3000/6610	8.25	TL

SAKURA®

SR235
SR235P
SR235SR

- Designed for only trailer or semi - trailer highway use, at higher speeds for middle to long distances
- Special tread structure improves stone rejection and prevents uneven wearing
- A flat, wide tread and special tread compound achieve a long tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 150/147K	16	1085	295	(S) 830/120 (D) 830/120	(S) 3350/7390 (D) 3075/6780	8.00	TT
11.00R20 152/149K	18	1085	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
11R22.5 149/146M	18	1053	282	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25	TL
12R22.5 152/149L	18	1085	297	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
12R22.5 154/151L	20	1085	298	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00	TL

SAKURA®

SR268

- Designed for only trailer or semi - trailer highway use, at higher speeds for middle to long distances
- Special tread structure improves stone rejection and prevents uneven wearing
- A flat, wide tread and special tread compound achieve a long tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
11R22.5 149/146M	18	1052	280	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25	TL
295/80R22.5 152/149M	18	1053	307	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL

SAKURA®

SR266A/SR266

Designed for only trailer or semi - trailer highway use at higher speeds for middle to long distances.

Tread structure improves stone rejection and prevents uneven wear.

Flat, wide tread with special compound delivers long life.

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1086	304	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
295/60R22.5 150/147L	18	924	300	(S) 900/130 (D) 900/130	(S) 3350/7390 (D) 3075/6780	9.00	TL
275/80R22.5 149/146M	18	1022	280	(S) 900/130 (D) 900/130	(S) 3250/7160 (D) 3000/6610	8.25	TL
295/80R22.5 152/149M	18	1052	305	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL
315/80R22.5 157/154L	20	1081	316	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00	TL

SAKURA®

SM602

- Designed for only trailer or semi - trailer
- Four high tensile belts provide a superior strength casing to resist cracking and puncture
- A flat, wide tread with special compound delivers long tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 152/149K	18	1088	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12.00R20 156/153K	20	1123	315	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SM601 / SM606
SM601 SR

- Designed for only trailer or semi - trailer
- Four high tensile belts provide a superior strength casing to resist cracking and puncture
- A flat, wide tread with special compound delivers long tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1058	278	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50	TT
11.00R20 152/149K	18	1086	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12R22.5 152/149L	18	1088	295	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
12R22.5 154/151K	20	1088	295	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00	TL
13R22.5 156/153K	20	1124	319	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75	TL
315/80R22.5 157/154L	20	1082	314	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00	TL

SAKURA®

SM902 / SM902K
SM902II

- Designed for only trailer or semi - trailer
- Extraordinary mix pattern
  resistance to puncture, cracking and cutting
- Bead area structure provides excellent heavy load stability
- Deep tread aids resistance to abrasion
- High durability and excellent retreadability
- Anti-wearing compound delivers long tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1059	278	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50	TT
12.00R20 156/153K	20	1124	315	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SR225
SR225II / SR225SR

- Designed for only trailer or semi - trailer use in long distance and good roads
- Better performance for stone and mud resistance
- Low rolling resistance and fuel saving
- Special tread structure offers long abrasion resistance

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim	Type TT/TL
11.00R20 152/149K	18	1085	297	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
315/80R22.5 154/151L	18	1083	315	(S) 830/120 (D) 830/120	(S) 3750/8270 (D) 3450/7610	9.00	TL
13R22.5 156/153L	20	1117	312	(S) 930/135 (D) 930/135	(S) 4000/8825 (D) 3650/8050	9.75	TL

SAKURA®

SL533
SL533K

- Designed for only trailer or semi - trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 152/149J	18	1093	297	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12.00R20 156/153J	20	1129	318	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SL532K

- Designed for only trailer or semi-trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1129	316	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SL537K UP

- Designed for only trailer or semi - trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1129	316	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SL505

- Designed for only trailer or semi-trailer in short distance and low speed condition
- Extra-deep and block pattern delivers a long tread life
- Extra block pattern prevents cutting and tearing

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149F	18	1094	302	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	9.00	TL

SAKURA®

TUTTORIO

Designed for only trailer or semi - trailer highway use at higher speeds for middle to long distances.

Tread structure improves stone rejection and prevents uneven wear.

Flat, wide tread with special compound delivers long life.

RECOMMENDED ●

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 154/151L	20	1086	305	(S) 970/140 (D) 970/140	(S) 3750/8270 (D) 3450/7610	9.00	TL

SAKURA®

SA951K / SA951

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1125	314	(S) 930/135 (D) 930/135	(S) 3250/7165 (D) 3000/6615	7.50	TT
12.00R20 156/153K	20	1125	314	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SL357K

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1125	312	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

SL557K

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1130	318	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SAKURA®

CR285

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
245/70R19.5 141/140K	18	844	247	(S) 850/123 (D) 850/123	(S) 2575/5675 (D) 2500/5510	7.50	TL

SAKURA®

SR211

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
10R22.5 144/142M	16	1020	256	(S) 900/130 (D) 900/130	(S) 2800/6175 (D) 2650/5840	7.50	TL

SAKURA®

CR105/CR105+

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
11R22.5 152/148J	18	1052	280	(S) 830/120 (D) 830/120	(S) 3550/7830 (D) 3150/6940	8.25	TL
295/80R22.5 152/149J	18	1053	302	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL

SAKURA®

SD711L

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1094	301	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL

SAKURA®

SR169A

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1089	298	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL

SAKURA®

CR297

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
425/65R22.5 164K	20	1136	412	(S) 830/120	(S) 5000/11000	12.25	TL

SAKURA®

SD816HD

- Designed for only trailer or semi - trailer

RECOMMENDED

**This product cannot be used for lorries truck and buses.*

Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/ lbs)	Meas. rim width (in)	Type TT/TL
315/80R22.5 154/151L	18	1092	316	(S) 830/120 (D) 830/120	(S) 3750/8270 (D) 3450/7610	9.00	TL

SAKURA®