


SAKURA®

CATALOGUE

This version is applied for TBL Ha Noi CO.,LTD; Vietnam only

With special design and compound for only use of
trailer or semi - trailer

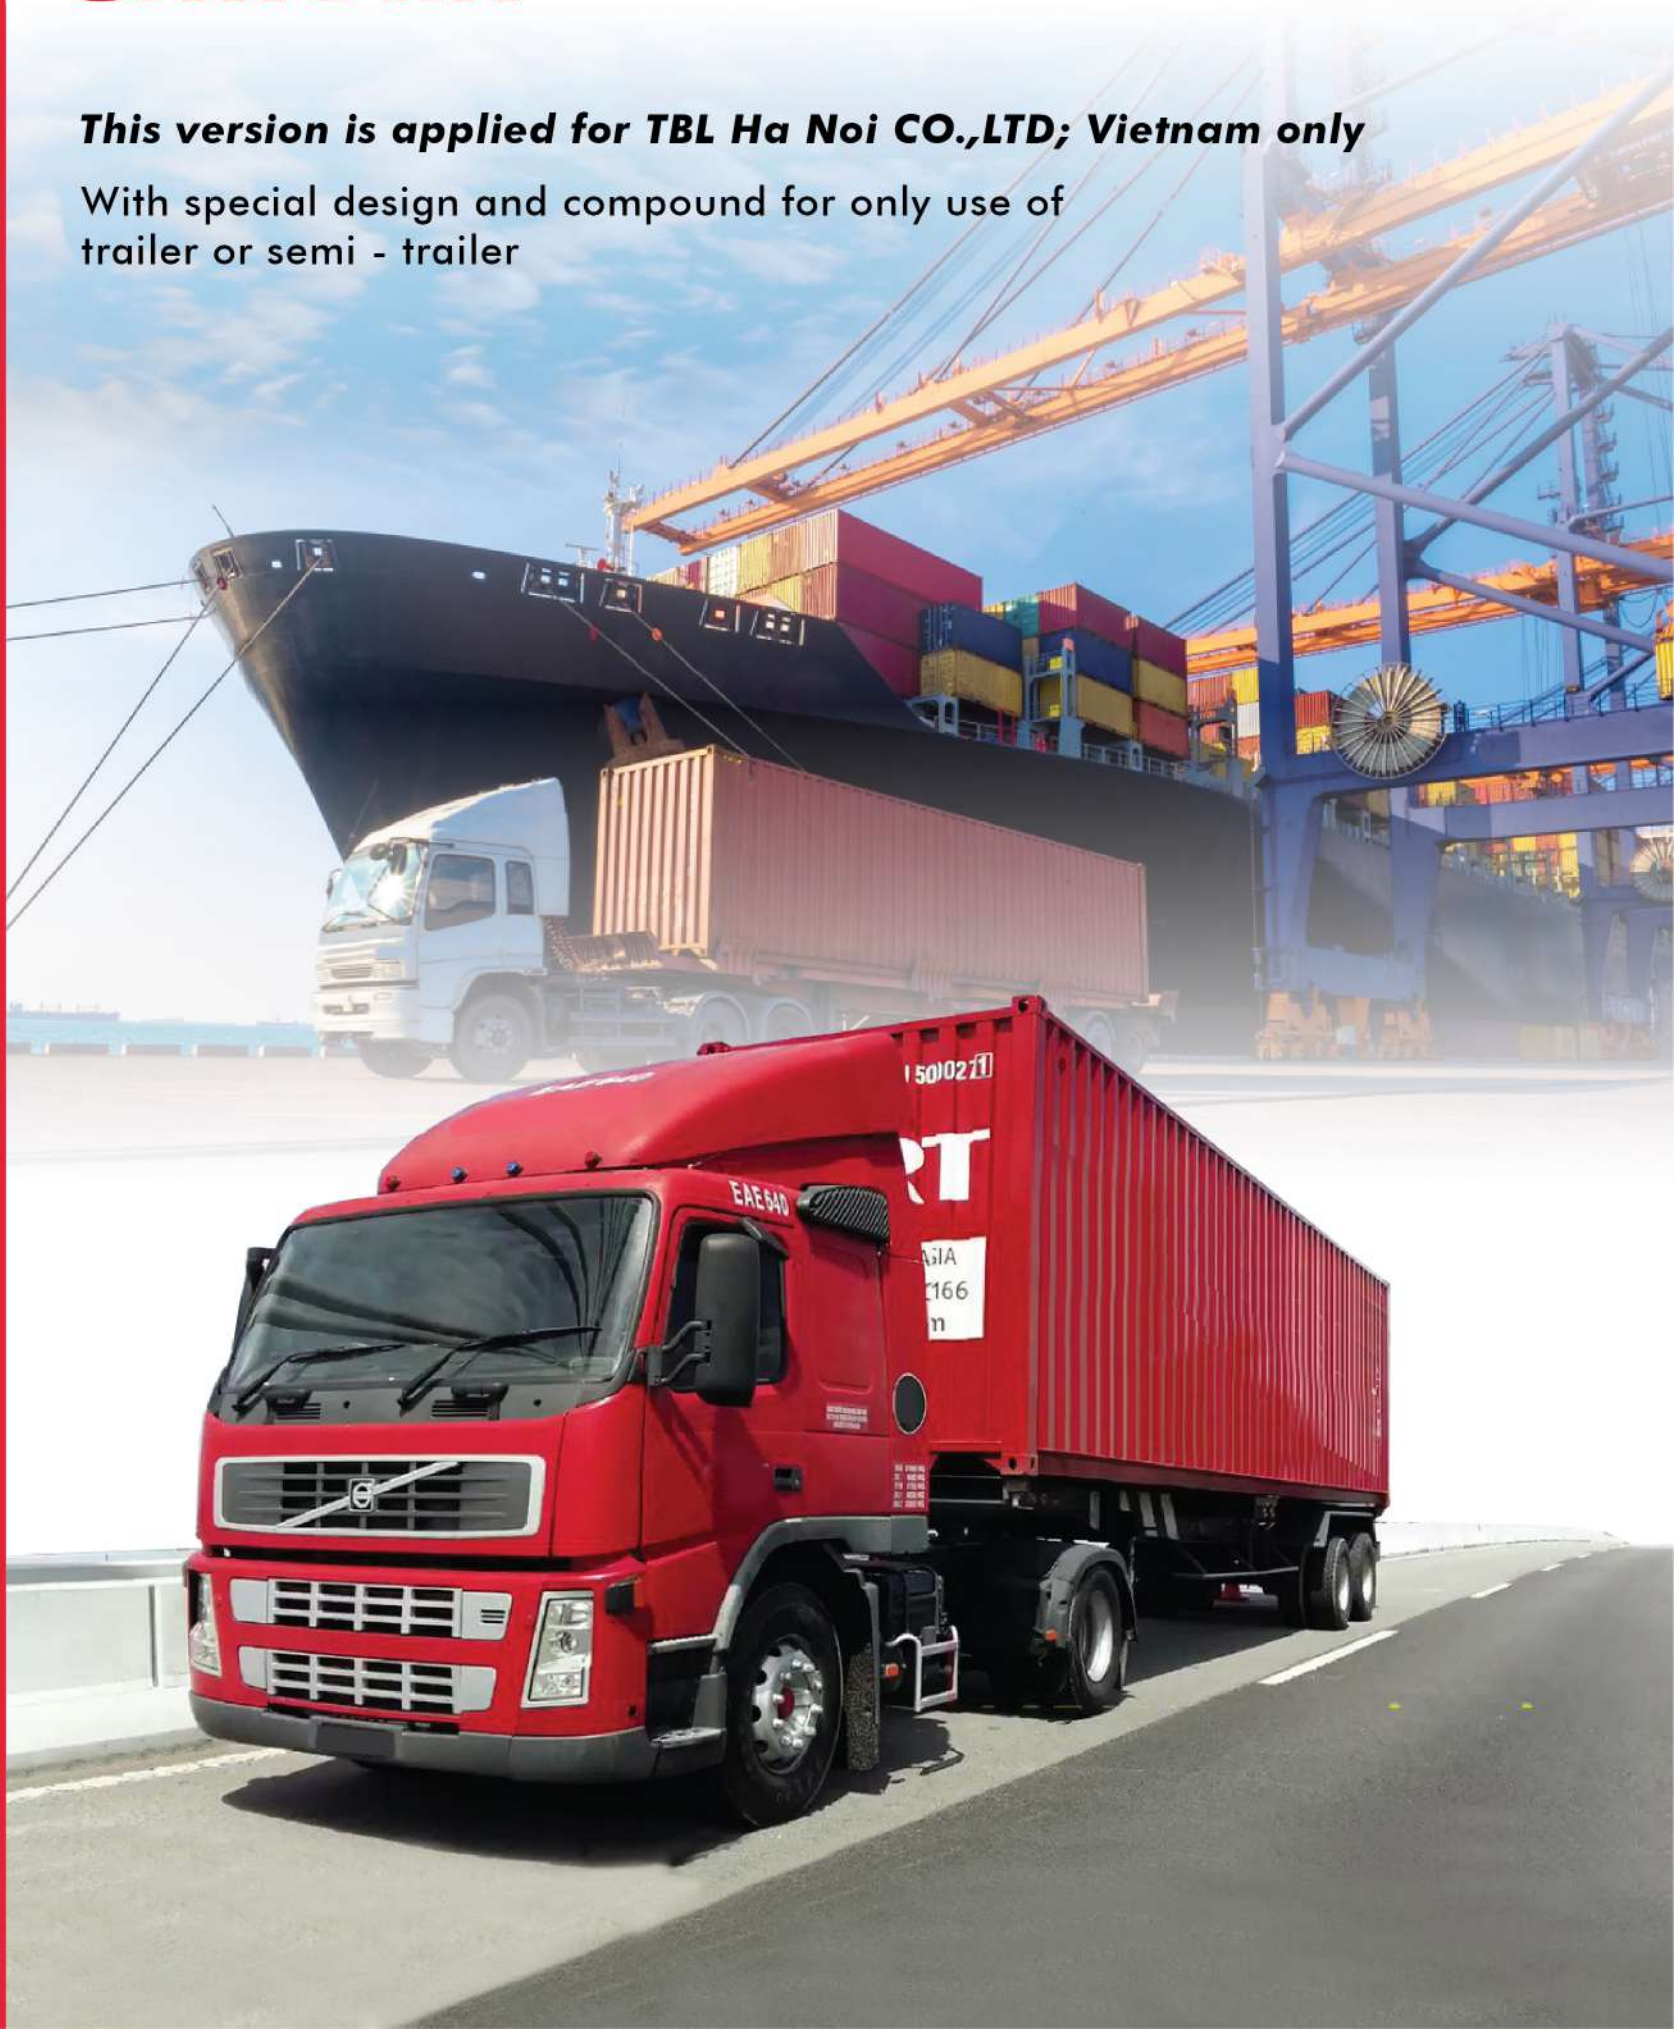

SR215



- Designed for only trailer or semi - trailer
- Better performance for stone and mud resistance
- Low rolling resistance and fuel saving
- Special tread structure offers long abrasion resistance

RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
215/75R17.5 135/133J	16	775	211	(S) 850/123 (D) 850/123	(S) 2180/4805 (D) 2060/4540	6.00	TL
235/75R17.5 143/141J	16	804	240	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75	TL
245/70R17.5 143/141J	18	792	245	(S) 875/128 (D) 875/128	(S) 2725/6005 (D) 2575/5675	7.50	TL
275/70R22.5 148/145L	18	967	277	(S) 900/130 (D) 900/130	(S) 3150/6940 (D) 2900/6395	8.25	TL
275/80R22.5 149/146M	18	1023	279	(S) 900/130 (D) 900/130	(S) 3250/7160 (D) 3000/6610	8.25	TL



SR235

SR235 P

SR235SR

- Designed for only trailer or semi - trailer highway use, at higher speeds for middle to long distances
- Special tread structure improves stone rejection and prevents uneven wearing
- A flat, wide tread and special tread compound achieve a long tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 150/147K	16	1085	295	(S) 830/120 (D) 830/120	(S) 3350/7390 (D) 3075/6780	8.00	TT
11.00R20 152/149K	18	1085	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
11R22.5 149/146M	18	1053	282	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25	TL
12R22.5 152/149L	18	1085	297	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
12R22.5 154/151L	20	1085	298	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00	TL

SR268

- Designed for only trailer or semi - trailer highway use, at higher speeds for middle to long distances
- Special tread structure improves stone rejection and prevents uneven wearing
- A flat, wide tread and special tread compound achieve a long tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
11R22.5 149/146M	18	1052	280	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25	TL
295/80R22.5 152/149M	18	1053	307	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL



SR266A/SR266

Designed for only trailer or semi - trailer highway use at higher speeds for middle to long distances.

Tread structure improves stone rejection and prevents uneven wear.

Flat, wide tread with special compound delivers long life.



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1086	304	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
295/60R22.5 150/147L	18	924	300	(S) 900/130 (D) 900/130	(S) 3350/7390 (D) 3075/6780	9.00	TL
275/80R22.5 149/146M	18	1022	280	(S) 900/130 (D) 900/130	(S) 3250/7160 (D) 3000/6610	8.25	TL
295/80R22.5 152/149M	18	1052	305	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL
315/80R22.5 157/154L	20	1081	316	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00	TL

SM602

- Designed for only trailer or semi - trailer
- Four high tensile belts provide a superior strength casing to resist cracking and puncture
- A flat, wide tread with special compound delivers long tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 152/149K	18	1088	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12.00R20 156/153K	20	1123	315	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SM601 / SM606

SM601 SR



- Designed for only trailer or semi - trailer
- Four high tensile belts provide a superior strength casing to resist cracking and puncture
- A flat, wide tread with special compound delivers long tread life

RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1058	278	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50	TT
11.00R20 152/149K	18	1086	295	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12R22.5 152/149L	18	1088	295	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL
12R22.5 154/151K	20	1088	295	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00	TL
13R22.5 156/153K	20	1124	319	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75	TL
315/80R22.5 157/154L	20	1082	314	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00	TL

SM902 / SM902K SM902II

- Designed for only trailer or semi - trailer
- Extraordinary mix pattern resistance to puncture, cracking and cutting
- Bead area structure provides excellent heavy load stability
- Deep tread aids resistance to abrasion
- High durability and excellent retreadability
- Anti-wearing compound delivers long tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1059	278	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50	TT
12.00R20 156/153K	20	1124	315	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



SR225

SR225II / SR225SR



- Designed for only trailer or semi - trailer use in long distance and good roads
- Better performance for stone and mud resistance
- Low rolling resistance and fuel saving
- Special tread structure offers long abrasion resistance

RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim	Type TT/TL
11.00R20 152/149K	18	1085	297	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
315/80R22.5 154/151L	18	1083	315	(S) 830/120 (D) 830/120	(S) 3750/8270 (D) 3450/7610	9.00	TL
13R22.5 156/153L	20	1117	312	(S) 930/135 (D) 930/135	(S) 4000/8825 (D) 3650/8050	9.75	TL



SL533

SL533K

- Designed for only trailer or semi - trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
11.00R20 152/149J	18	1093	297	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00	TT
12.00R20 156/153J	20	1129	318	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



SL532K

- Designed for only trailer or semi-trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1129	316	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



SL537K UP

- Designed for only trailer or semi - trailer in short distance and low speed condition
- Special tire structure provides superior load capacity
- Durable carcass achieves a long and recyclable tread life



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1129	316	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT

SL505

- Designed for only trailer or semi-trailer in short distance and low speed condition
- Extra-deep and block pattern delivers a long tread life
- Extra block pattern prevents cutting and tearing



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149F	18	1094	302	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	9.00	TL

TUTTORIO

Designed for only trailer or semi - trailer highway use at higher speeds for middle to long distances.

Tread structure improves stone rejection and prevents uneven wear.

Flat, wide tread with special compound delivers long life.



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 154/153L	20	1086	305	(S) 970/140 (D) 970/140	(S) 3750/8270 (D) 3450/7610	9.00	TL



SA951K / SA951

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
10.00R20 149/146K	18	1125	314	(S) 930/135 (D) 930/135	(S) 3250/7165 (D) 3000/6615	7.50	TT
12.00R20 156/153K	20	1125	314	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



SL357K

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1125	312	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



SL557K

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12.00R20 156/153K	20	1130	318	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50	TT



CR285

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
245/70R19.5 141/140K	18	844	247	(S) 850/123 (D) 850/123	(S) 2575/5675 (D) 2500/5510	7.50	TL

SR211

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
10R22.5 144/142M	16	1020	256	(S) 900/130 (D) 900/130	(S) 2800/6175 (D) 2650/5840	7.50	TL

CR105/CR105+

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
11R22.5 152/148J	18	1052	280	(S) 830/120 (D) 830/120	(S) 3550/7830 (D) 3150/6940	8.25	TL
295/80R22.5 152/149J	18	1053	302	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00	TL

SD711L

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1094	301	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL



SR169A

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
12R22.5 152/149L	18	1089	298	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00	TL

CR297

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
425/65R22.5 164K	20	1136	412	(S) 830/120	(S) 5000/11000	12.25	TL

SD816HD

- Designed for only trailer or semi - trailer



RECOMMENDED



Size	Ply rating	Overall diam. (mm)	Section width (mm)	Max press. (kpa/psi)	Max load (kg/lbs)	Meas. rim width (in)	Type TT/TL
315/80R22.5 154/151L	18	1092	316	(S) 830/120 (D) 830/120	(S) 3750/8270 (D) 3450/7610	9.00	TL



SAKURA®